
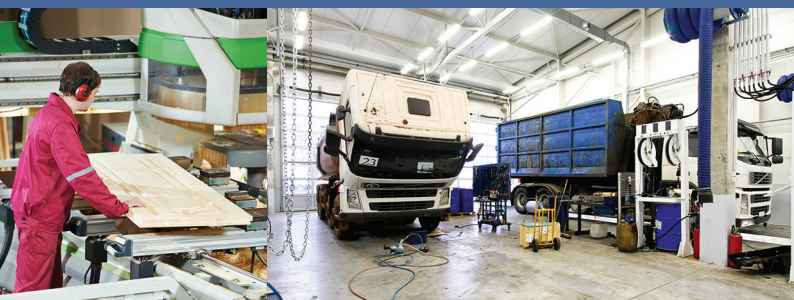


# Largo & Allegro

## Air Compressors

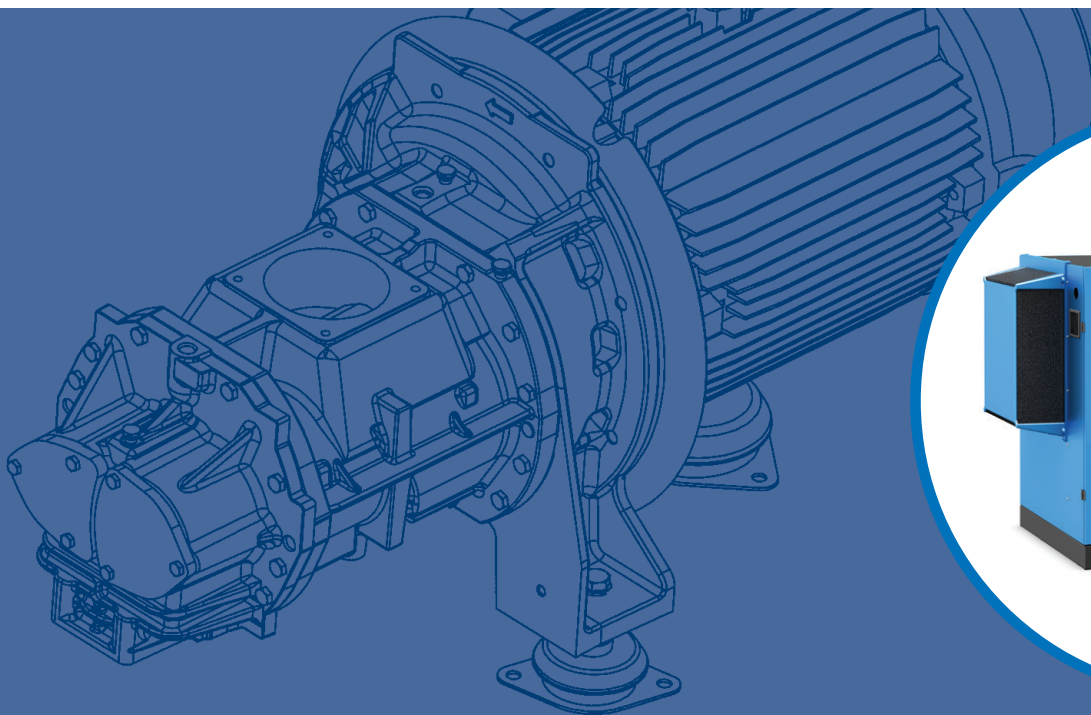

LARGO & ALLEGRO 31-110

**ALUP**  
Kompressoren

## ALUP's heritage

Founded in Germany in 1923, the company derives its name of the automotive products that were manufactured in the Köngen' mechanical workshop where ALUP came into existence: Auto-LUft-Pumpen. Only two years later, the first range of piston compressors was being developed, whilst in 1980 rotary screw compressors were added to the product offer.

Over time, experience grew and innovation prospered, leading to today's high quality product portfolio. As such, the name ALUP Kompressoren has become synonymous with innovative technology blended with a strong sense of tradition.

Today, ALUP Kompressoren is still operating out of its home town Köngen, where everything started in 1923.



## Driven by technology Designed by experience

Discover what happens when a passion for technology is fused with hands-on industrial experience. Designs evolve towards more practical installation and maintenance, giving you the freedom to focus on your job. Product ranges include the exact machine you need, with the right options for your performance needs. Return on investment is ensured, while your carbon footprint shrinks. And, because we stay close to our customers, we're one step ahead when your needs change.


**INNOVATION  
HANDS-ON  
EXPERIENCE  
PEACE OF MIND  
TOTAL COST  
OF OWNERSHIP  
PARTNERSHIP**

## The power of the Largo & Allegro range

*Largo & Allegro 31-110 screw compressors provide high-quality compressed air for a wide range of industrial applications. The result of continuous investment in product development, Largo & Allegro 31-110 compressors are built around three innovative features which make them stand out.*

### Superior efficiency

- In-house design compression elements.
- Direct drive transmission.
- High-efficiency radial cooling fan.
- IE3 / NEMA Premium Efficiency motor.
- Integrated air dryer



### Intelligent control

- Aircontrol 5.1 full-colour 3.5 inch HD screen.
- Intelligent unload cycle control.
- Precise pressure control.
- Warning indications.
- Graphical indication service plan.
- Additional communication possibilities.



### Ultimate reliability and serviceability

- Proven designs
- Reputed brands
- Modular design.
- Extensive service support.
- Designed for harsh conditions and ambient temperatures up to 46°C.

[www.alup.com](http://www.alup.com)



# 10 reasons to choose Alup

*Check out these innovative features and see how they provide you with high efficiency, ease of maintenance, low noise levels and outstanding cooling.*




## 1. Element and drive train

- Gearbox technology ensuring outstanding efficiency and continued reliability.
- Innovative design resulting in a smaller footprint.

## 2. High efficiency motors

- IE3 / NEMA Premium efficiency motor (standard on fixed speed machines, optional on variable speed ones).
- IP55, insulation Class.



## 3. Radial fan

- Low power consumption & reduced noise levels.
- Optimal cooling flow.
- Increased lifetime of oil, consumables and compressor.

## 4. Standard enclosed intake filter

- Low noise levels thanks to design and position of filter.
- Improved FAD due to air intake positioning.
- High quality filtration to maximize oil quality and protect your compression element.

## 5. Intelligent controller

- The full-color graphic control of the Air Control 5.1 offers a user-friendly interface to access all the compressor parameters, service notifications and events.
- The various control modes and intelligent algorithms allow the compressor to automatically adapt to demand changes.



## 6. Solid inlet baffle

- Small installation footprint: the unit can be placed against a wall.
- Fitted with insulation foam to reduce noise.
- Optimized air flow for improved cooling.
- Added protection for the cooling fan.



## 7. In-house designed oil separator vessel


- Integrated minimum pressure valve (MPV) eliminates risk of leakage.
- Long lifetime thanks to cast iron parts.
- Designed for optimal oil separation.

## 8. Separate inverter cubicle

- Easy access for maintenance and cleaning.
- Optimal cooling ensures a longer lifetime.

## 9. Separate coolers

- Separate oil and air cooler for high-quality cooling and long lifetime of the coolers.
- Gliding rails for easy and safe removal.
- Easy access for cleaning.

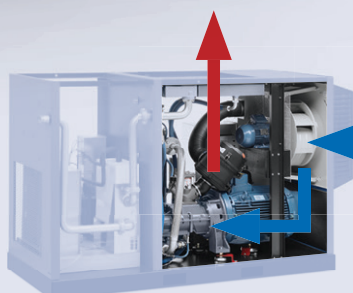

## 10. Improved motor cooling

- Separate cooling flow.
- Suitable for harsh conditions and temperatures up to 46°C.




# Optimize your energy consumption

Did you know that energy costs represent about 70% of the total operating cost of your compressor over a 5-year period? That's why reducing the energy consumption of our compressed air installation should be a major focus.

## Variable speed technology

For the right application, variable speed technology, such as on the Allegro variable frequency drive compressor, can cut the energy bill of your compressor by up to 35%. The Allegro reduces energy consumption in the following ways:

- The variable frequency drive compressor matches air supply with demand therefore reducing energy consumption when the demand is lower. If the demand is stable then the Airlogic<sup>2</sup> controller guarantees a fixed set pressure.
- No unload cycles above 20% load.
- No peak current due to soft start.

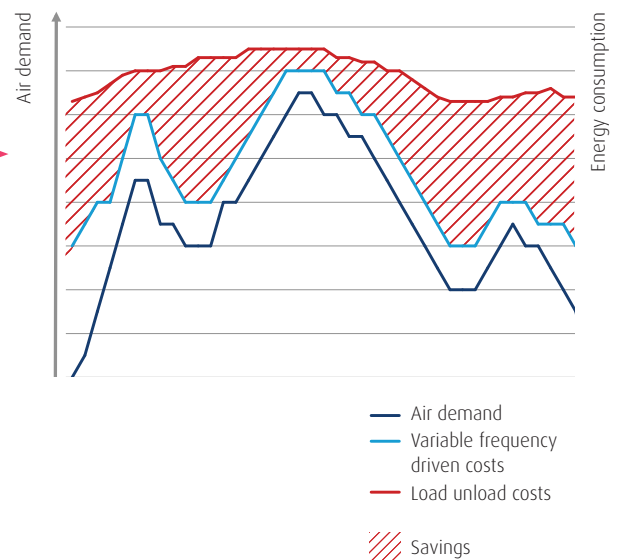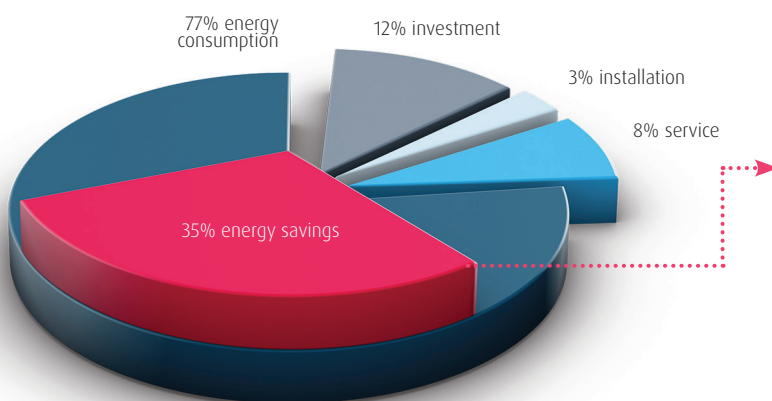


## Energy audit

Knowing what compressor is right for your application is critical to minimizing the energy consumption. With our Energy Audit we can simulate your compressed air needs and then consult you on the best solution for your needs. For more information, please contact your local Alup representative.

## Energy recovery

When air is compressed, heat is formed. The excess heat can be captured with an energy recovery option and channeled to other applications allowing you to save energy and cut costs. The energy recovery option integrates a heat exchanger on the oil circuit, which heats up the continuously pressurized water flow. The system is regulated automatically, and in case of limited water cooling capacity, the standard cooling system of the compressor will operate and backup the energy recovery device.

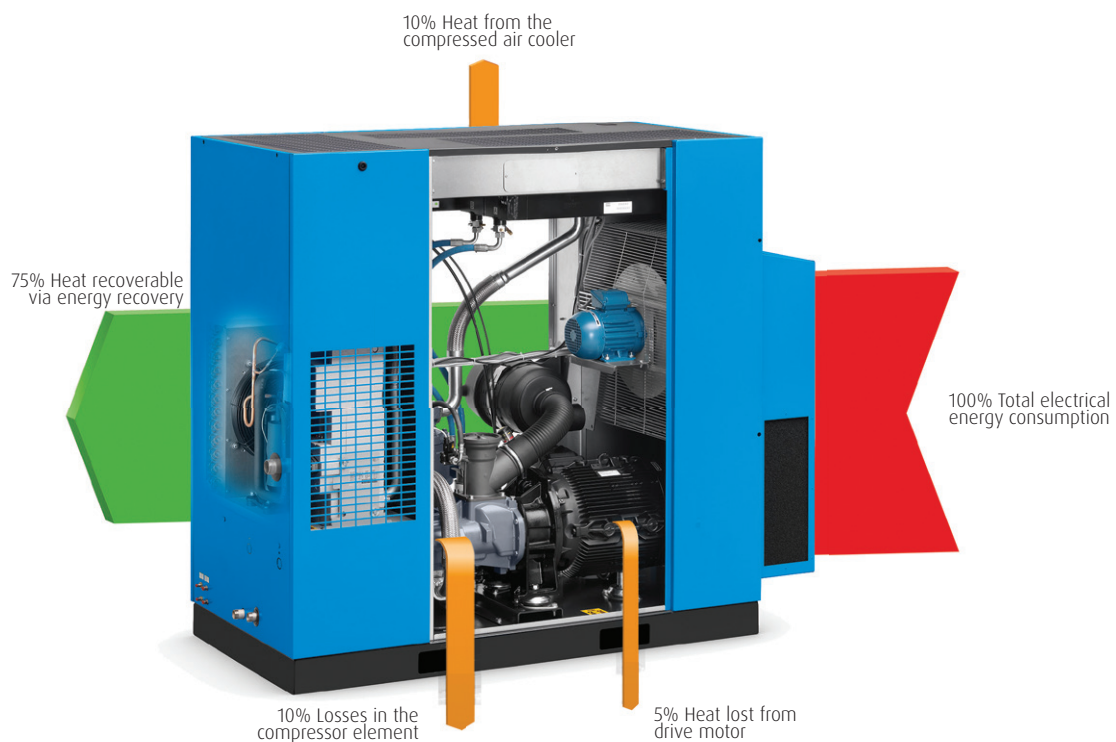

## Intelligent graphic controller

The multiple control and monitoring features of the controller dramatically increases the compressor's efficiency and reliability. Efficiency is maximized by controlling the main drive motor and regulating the system pressure within a pre-defined and narrow pressure band.

### Control and monitoring features:

- Warning indications.
- Graphical indication service plan.
- Integrated sequence for up to 6 compressors limiting the energy consumption and equalizing running hours across your whole system.
- Online visualization of running conditions.





## Central controller technology

*For installations with multiple compressors, a costly cascade system with a wide pressure band used to be the only way to operate. Additionally, the running hours of the compressors were not synchronized making strategic servicing difficult. Install the EControl6 or the integrated compressor control (with a license) and get simple, central control to reduce system pressure and energy consumption in installations of up to 4 or 6 compressors.*



### Control features

- Single pressure measurement point.
- Minimized pressure band.
- Stable system pressure.
- Equalization of running hours.
- Multiple IVR speed control.
- Clear and visual graphical display.
- Online monitoring and controlling possible.

## Enhanced air quality

Many people do not realize that the operating environment can have a major impact on the air quality at the compressor outlet. Even in a dedicated compressor house the inlet air can contain particulate or moisture which can have a negative impact on the production.


Largo & Allegro 30-75 compressors are available with an integrated dryer option, which offers significant advantages compared to a stand-alone dryer:

- Condensation removal at source minimizing pipework corrosion.
- Reduced footprint, up to 1/3rd of a stand-alone dryer.
- Intelligent dryer control, controlled by the Air Control 5.1.
- Higher operating temperatures compared to stand-alone.
- Single service visit, reducing maintenance costs.
- No installation cost.





## Options to optimize your operations

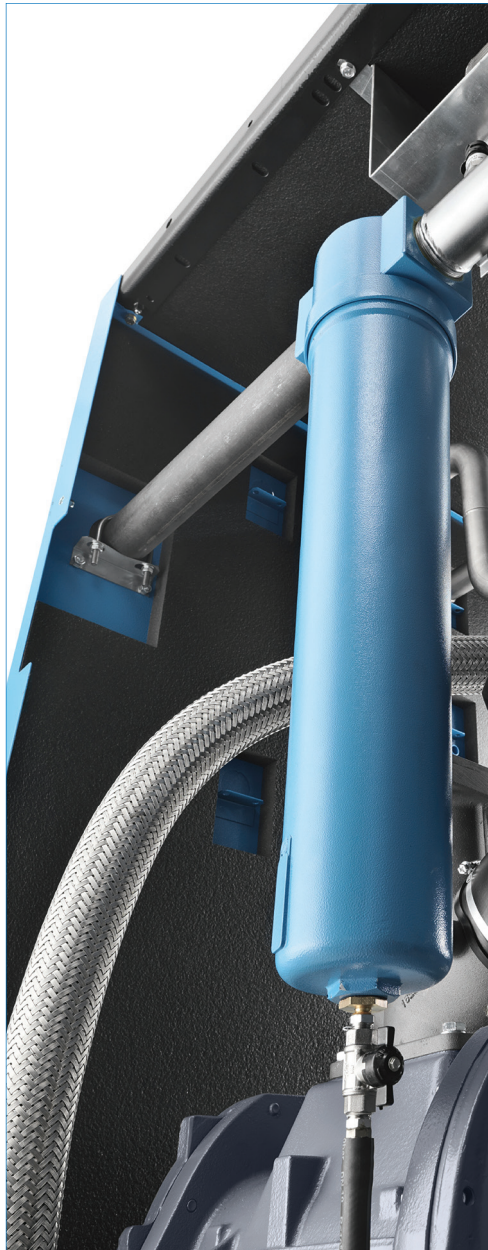

Every installation is different, therefore we offer you a wide range of options to enable you to personalize your Largo & Allegro 31-110 compressor to your needs.

### Air quality

- Internal water separator - reduces up to 90% of the condensate in the compressed air. (standard on Largo 31-37-45)
- Automatic drain - ensures no air loss during condensate removal (only in combination with internal water separator).
- Tropical thermostatic valve - for use in humid and hot conditions.
- High-efficiency air intake pre-filtration panel - avoids dust entering the compression element, protecting internal components and extending the compressor lifetime.

### Energy saving

- Energy recovery pack - recovers up to 75% of the energy formed during the compressor process heat, which can be used to heat up water for boilers, showers etc.

### Safety

- Wrong rotation direction control - protects the compressor from possible damage when the power supplied by the energy provider is unreliable.
- Water shut-off valve outside the canopy - for water-cooled machines.
- The oil pre-heater - guarantees a certain oil temperature in the oil vessel to avoid condensation.

### Control and monitoring

- ECO 4/6i - integrated multiple compressor control for 4/6 compressors.
- Remote monitoring - for additional convenience.

Available for Largo 31-37-45:

### Extended lifetime oil & filters

- "Plus" option including 4000 hours oil combined with an air and oil filter with the same lifetime.
- "Extended" option including 8000 hours oil with a long lifetime oil filter. This will guarantee optimal performance at all times.

## Technical data

Fixed speed version	Max. working pressure	Reference working pressure	Free Air Delivery @ reference conditions*				Motor power		Noise level**	Cooling air volume	Weight		Compressed air output diameter
			m³/min	m³/h	l/s	cfm	kW	hp			std	plus	
Model	bar	m³/min	m³/h	l/s	cfm	kW	hp	dB(A)	m³/h		kg	kg	"
<b>LARGO 31</b>	7.5	7	357	99	210	30	40	66	6660	626	796	1"1/2	
	8.5	8	324	90	190	30	40	66	6660				
	10	9.5	297	83	175	30	40	66	6660				
	13	12.5	255	71	150	30	40	66	6660				
<b>LARGO 37</b>	7.5	7	419	116	247	37	50	67	6660	683	853	1"1/2	
	8.5	8	390	108	229	37	50	67	6660				
	10	9.5	367	102	216	37	50	67	6660				
	13	12.5	319	89	188	37	50	67	6660				
<b>LARGO 45</b>	7.5	7	492	137	290	45	60	68	6660	692	900	1"1/2	
	8.5	8	465	129	273	45	60	68	6660				
	10	9.5	428	119	252	45	60	68	6660				
	13	12.5	375	104	221	45	60	68	6660				
<b>LARGO 55</b>	7.5	7	601	167	354	55	75	70	9000	1130	1403	2"	
	8.5	8	572	159	337	55	75	70	9000				
	10	9.5	540	150	318	55	75	69	9000				
	13	12.5	447	124	263	55	75	69	9000				
<b>LARGO 75</b>	7.5	7	774	215	456	75	100	71	12600	1317	1590	2"	
	8.5	8	756	210	445	75	100	71	12600				
	10	9.5	677	188	399	75	100	70	12600				
	13	12.5	582	162	343	75	100	70	12600				
<b>LARGO 76</b>	7.5	7	882	245	519	75	100	69	12600	1570	NA	2"	
	8.5	8	821	228	483	75	100	69	12600				
	10	9.5	742	206	437	75	100	68	12600				
	13	12.5	629	175	370	75	100	68	12600				
<b>LARGO 90</b>	7.5	7	986	274	581	90	125	70	14760	1600	NA	2"	
	8.5	8	972	270	572	90	125	70	14760				
	10	9.5	868	241	551	90	125	69	14760				
	13	12.5	721	200	425	90	125	69	14760				
<b>LARGO 110</b>	7.5	7	1238	344	729	110	150	74	14760	1800	NA	2"	
	8.5	8	1181	328	695	110	150	74	14760				
	10	9.5	1073	298	632	110	150	73	14760				
	13	12.5	907	252	534	110	150	73	14760				

\* Unit performance measured according to ISO 1217, Annex C, latest edition.

\*\* Noise level measured according to ISO 2151 with optional baffle.

All technical data for air-cooled machines without integrated dryer.

For technical data of water-cooled machines or machines with integrated dryer, please contact your local salesforce.



## Dimensions Largo

	Length std	Length plus	Width	Height
Model	mm	mm	mm	mm
<b>LARGO 31</b>	1555	2055	890	1790
<b>LARGO 37</b>				
<b>LARGO 45</b>				
<b>LARGO 55</b>	1923	2773	1060	1630
<b>LARGO 75</b>				
<b>LARGO 76</b>	2125	NA	1060	1630
<b>LARGO 90</b>				
<b>LARGO 110</b>	2333	NA	1060	1630

## Technical data

Inverter driven version	Working pressure	Min. free air delivery (7 bar)*			Max. free air delivery																
Model	bar	7	7	7	7	7	7	9.5	9.5	9.5	10	10	10	12.5	12.5	12.5	13	13	13		
		m³/h	l/s	cfm	m³/h	l/s	cfm	m³/h	l/s	cfm	m³/h	l/s	cfm	m³/h	l/s	cfm	m³/h	l/s	cfm		
ALLEGRO 31	4-10	95	27	56	335	93	197	289	80	170	281	78	165	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	83	23	49	291	81	171	289	80	170	289	80	170	236	66	139	229	64	135		
ALLEGRO 37	4-10	118	33	69	414	115	244	364	101	214	353	98	208	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	103	29	60	360	100	212	364	101	214	363	101	214	284	79	167	276	77	162		
ALLEGRO 45	4-10	139	38	82	486	135	286	428	119	252	416	115	245	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	120	33	71	421	117	248	428	119	252	428	119	252	369	102	217	358	99	211		
ALLEGRO 55	4-10	169	47	100	594	165	350	536	149	316	520	145	306	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	149	41	88	522	145	307	536	149	316	535	149	315	447	124	263	434	120	255		
ALLEGRO 75	4-10	221	61	130	774	215	456	663	184	390	643	179	379	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	190	53	112	667	185	393	663	184	390	661	184	390	582	162	343	565	157	333		
ALLEGRO 76	4-10	251	70	148	874	243	516	752	209	443	730	203	430	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	211	59	124	742	206	437	752	209	443	751	209	442	629	175	370	610	169	359		
ALLEGRO 90	4-10	282	78	166	990	275	583	846	235	498	821	228	483	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	243	67	143	851	237	501	846	235	498	845	235	497	721	200	425	700	194	412		
ALLEGRO 110	4-10	199	55	117	1145	318	674	1020	283	601	990	275	583	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.		
	4-13	167	46	98	960	267	565	954	265	562	952	264	561	883	245	520	857	238	504		

\* Unit performance measured according to ISO 1217, Annex C, latest edition.

\*\* Noise level measured according to ISO 2151 with optional baffle.

All technical data for air-cooled machines without integrated dryer. For technical data of water-cooled machines or machines with integrated dryer, please contact your local salesforce.

Model	Motor power		Noise level**	Cooling air volume	Weight		Compressed air output diameter
	kW	hp			std kg	plus kg	
ALLEGRO 31	30	40	67	5400	840	1025	1"1/2
	30	40	66	5400			
ALLEGRO 37	37	50	68	5760	920	1105	1"1/2
	37	50	67	5760			
ALLEGRO 45	45	60	69	7200	925	1110	1"1/2
	45	60	68	7200			
ALLEGRO 55	55	75	71	9000	1200	1473	2"
	55	75	70	9000			
ALLEGRO 75	75	100	71	12600	1387	1660	2"
	75	100	70	12600			
ALLEGRO 76	75	100	70	12600	1640	NA	2"
	75	100	69	12600			
ALLEGRO 90	90	125	71	14760	1670	NA	2"
	90	125	70	14760			
ALLEGRO 110	110	150	74	14760	1900	NA	2"
	110	150	73	14760			



## Dimensions Allegro

	Length std	Length plus	Width	Height
Model	mm	mm	mm	mm
ALLEGRO 31	1684	2333	1060	1630
ALLEGRO 37				
ALLEGRO 45				
ALLEGRO 55	1923	2773	1060	1630
ALLEGRO 75				
ALLEGRO 76	2125	NA	1060	1630
ALLEGRO 90				
ALLEGRO 110	2333	NA	1060	1630






DRIVEN BY TECHNOLOGY DESIGNED BY EXPERIENCE



CONTACT YOUR LOCAL  
ALUP KOMPRESSOREN  
REPRESENTATIVE

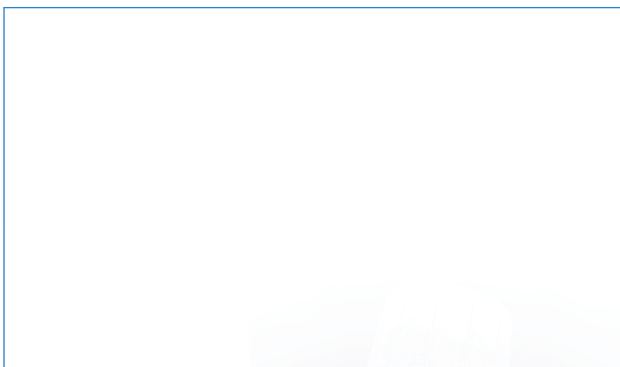

Care. Trust. Efficiency.

**Care.**

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

**Trust.**

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

**Efficiency.**

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.

[www.alup.com](http://www.alup.com)